



Samsung Galaxy Attain 4G Rear Housing Replacement

Written By: Josh Forester





TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Placement



- Begin by turn the device over to it's back, with the screen facing down.

Step 2 — Battery Door Removal

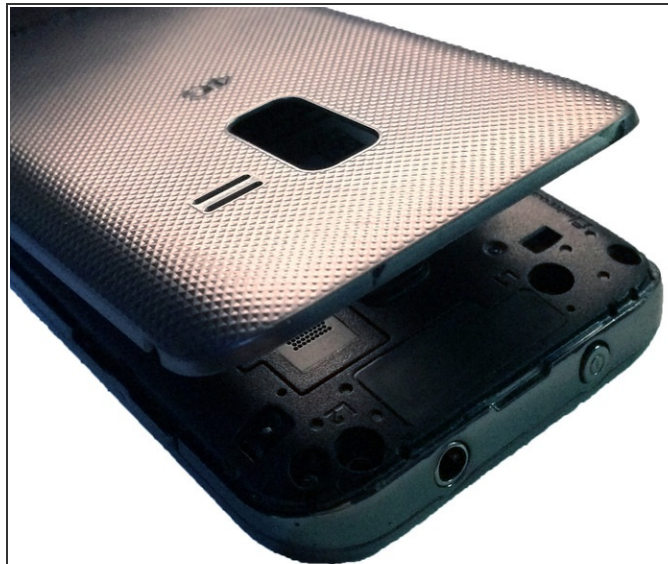


- At the top of the device there is a small notch that is used to remove the battery door.
- Using a pry tool or your fingernail, pry off the battery door from the main housing.

Step 3 — Battery Removal



- Place the battery door to the side.
- Using a pry tool or your fingernail, pry the battery up towards you.
- You have now removed the battery!

Step 4 — Heads Up!

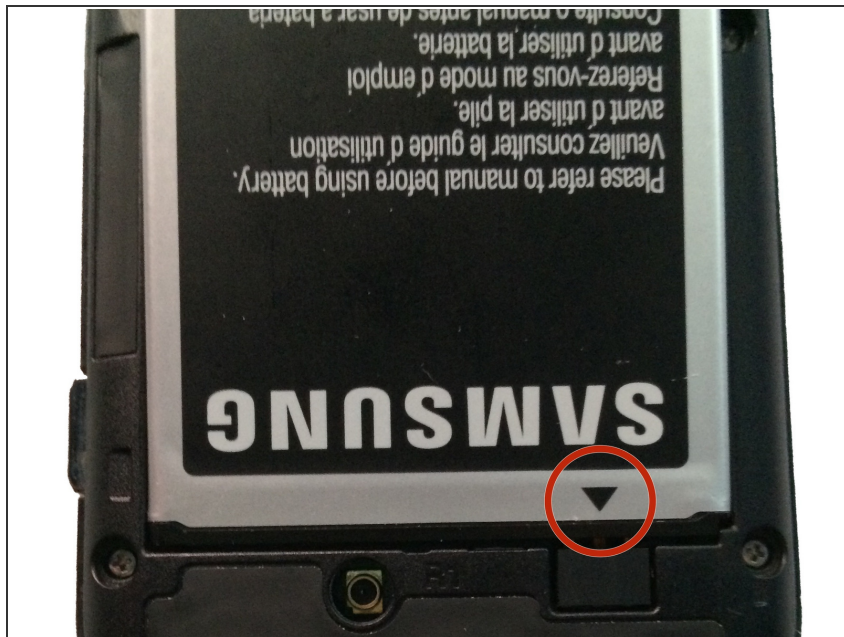

- ★ Make sure when replacing the battery that the arrow on the bottom is facing down.

Step 5 — Screw Removal



- Remove the 6 Phillips head screws that hold the rear housing in place.

Step 6 — Prying



- Using a spudger or plastic pry tool, slowly go around the phone between the display & rear housing to release the clips.

Step 7 — Remove Housing



- Lift the rear housing from the display assembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-01 11:52:05 AM.